

516592

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/057526 A1

- (51) International Patent Classification⁷: **G06K 19/06**
- (21) International Application Number:
PCT/SE2003/001687
- (22) International Filing Date: 31 October 2003 (31.10.2003)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:
0203853-7 23 December 2002 (23.12.2002) SE
- (71) Applicant (for all designated States except US): ANOTO
AB [SE/SE]; Scheelevägen 19 C, S-223 70 Lund (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): PETTERSSON,
Mats, Petter [SE/SE]; Bankgatan 9 A, S-223 52 Lund
(SE).
- (74) Agent: AWAPATENT AB; Box 5117, S-200 71 Malmö
(SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO,
CR, CU, CZ (utility model), CZ, DE (utility model), DE,
DK (utility model), DK, DM, DZ, EC, EE (utility model),
EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,

MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG,
US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii)) for the following designations AE,
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ,
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN,
IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,
MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM,
PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM,
ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD,
SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY,
KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG,
CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT,
LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ,
CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,
TG)

[Continued on next page]

(54) Title: INFORMATION CODE INCLUDING REDUNDANT INFORMATION PROVIDING COPY PROTECTION

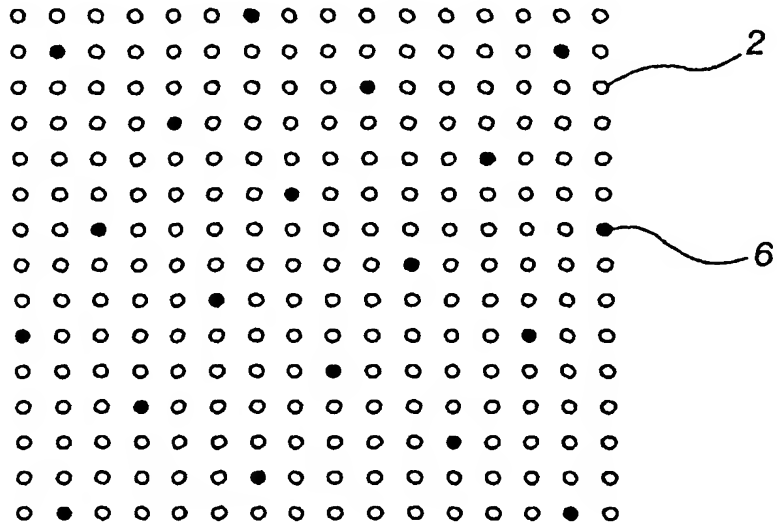

(57) Abstract: In an information code which is arranged to redundantly code at least one first information element by means of a first information element, one or more of the marks can be omitted for the coding of at least one additional information element. In addition, copy protection can be created for an information code that codes at least one first information element by means of a plurality of marks by the addition of at least one interference mark whose optical characteristics differ from those of the marks in the information code. After copying, all the marks will have the same optical characteristics.

WO 2004/057526 A1

WO 2004/057526 A1



— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INFORMATION CODETechnical Field

The present invention relates to a product which is provided with a first information code that is arranged to redundantly code a first information element by means of a plurality of marks. The invention also relates to methods and devices for coding and decoding an information code.

In addition, the invention relates to a product with an information code that cannot be copied while retaining its functionality and a method for producing such a product.

Background Art

It is already known that handwriting can be digitised by determining how a pen that is used to produce the handwriting is being moved. One way of carrying this out is to use a base for the handwriting that is provided with a position-coding pattern that codes coordinates for points on the base and also to provide the pen with a sensor that records the position-coding pattern locally at the pen point while the pen is being moved across the base. A processing unit, that can be placed in the pen or remotely from this, can thereafter decode the recorded position-coding pattern, so that the movement of the pen across the base can be determined as a series of coordinates.

In WO 01/26032, which has been assigned to the same Applicant as the Applicant for the present application, a position-coding pattern is described that can be used for digitising handwriting. The pattern is constructed of marks, which for example can be in the form of dots. Each dot has a nominal position, which can consist of an intersection between two lines in a virtual raster, for example a square grid. Each dot codes a particular value dependent upon its placing in relation to the nominal

position. The dots can, for example, have four possible placings, one on each of the four raster lines that emanate from the intersection, with the four different placings coding four different values. The coordinates for
5 a point are coded using a plurality of dots, for example 6*6 dots. Each dot contributes, however, to the coding of the coordinates for several points. If a sensor first reads 6*6 dots and thereafter is moved to the side or vertically by the distance of one dot, the sensor will
10 read dots that code the coordinates for a new point. Each set of 6*6 dots thus defines a position in the total position-coding pattern. In this application, this type of pattern is called "floating".

Using the position-coding pattern in the above-
15 mentioned WO 01/26032, coordinates can be coded for a very large number of points, theoretically 4^{36} points if each point is coded by 6*6 dots. All these points can be said to form an imaginary surface or constitute points in a coordinate system.

20 WO 01/71653, which has been assigned to the same Applicant as the Applicant for the present application, describes how the position-coding pattern described in WO 01/26032 can be used instead for general information coding.

25 WO 01/48685, which has also been assigned to the same Applicant as the Applicant for the present application, describes how the position-coding pattern in WO 01/26032 can be used to control the processing of the digital information that is recorded by means of
30 the position-coding pattern. More specifically, the processing unit that decodes the position-coding pattern can store different digital templates, that define how information that is recorded from different parts of the position-coding pattern is to be interpreted. An e-mail
35 template can, for example, specify that information, that is pairs of coordinates, recorded from a first field in the position-coding pattern on a base constitutes message

information, that information recorded from a second field constitutes an e-mail address and is to be interpreted by ICR (ICR = Intelligent Character Recognition), and that information recorded from a third field is to be regarded as an instruction to send the message information originating from the first field to the e-mail address determined from the second field. The digital template thus comprises a description of which coordinate areas correspond to which fields. The processing unit utilizes this description in order to determine how decoded pairs of coordinates are to be processed.

In addition, WO 01/48685 describes how the position-coding pattern can be divided into pages and how the same digital template that is in the processing unit can be used for several pages in the position-coding pattern.

In order to make possible flexible information processing, different parties may want to have bases with different functions associated with different fields, with different numbers of fields, with differently placed fields and with differently sized fields. For this purpose, the processing unit may need to store a large number of different digital templates, which in addition may need to be updated and supplemented, as different parties want to create new bases.

This can constitute a problem, particularly if the processing unit has limited memory capacity and/or if it is time-consuming to amend, supplement and/or update the digital templates once these have been stored in the processing unit. This can, for example, be the case if the processing unit is in a portable user unit, such as the pen in WO 01/48685.

In the Swedish patent application SE 0103029-5, which was filed on 13 September 2001 by the same Applicant as the Applicant for the present application and which was thus not available to the public at the time of filing SE 023853-7, from which the present application claims priority, a solution is proposed to the problem of

the need to store a multitude of digital templates. More specifically, use is proposed of a coding pattern that comprises a plurality of marks, the position information being coded by a variation in a first parameter of the marks and additional information being coded by a variation in a second parameter of the marks. The additional information can be used for indicating or marking out fields of the type described above in the coding pattern on the physical base. Instead of the information about the different fields being in digital templates, it can thus be coded directly in the coding pattern, with the result that in principle any layouts for information processing can be achieved on physical bases and that the processing unit needs to store considerably less information than in the case with digital templates.

The additional information can alternatively be used to indicate in the coding pattern on the physical base whether a particular field in a digital template with several alternative fields is activated or not. By digital templates being combined so that in each digital template there is a description of a large number of alternatively useable fields and by the fields used in each individual case being activated by means of the coding of additional information in the coding pattern on the physical base, the number of digital templates required can be reduced.

The indication or activation of fields is achieved by the coding pattern in the different fields being divided into cells, each of which comprises a plurality of marks, and by each of the cells being allocated a predetermined value by means of the variation in the second parameter.

In the Swedish patent application SE 0201846-3, which was filed on 18 June 2002 by the same Applicant as the Applicant for the present application and which was thus not available to the public at the time of filing SE 0203853-7, from which the present application claims

priority, an alternative solution is described to the problem of the need to store a multitude of digital templates. More specifically, it is proposed in this application that the fields are indicated by means of a second position-coding pattern, which can be coded using a second parameter of the dots that are comprised in the first position-coding pattern. The second position-coding pattern codes coordinates in a second coordinate system which is different from the first coordinate system in which the first position-coding pattern codes coordinates. The second coordinate system is divided into partial areas with different associated functions. Thus in this case the processing unit only needs to store a description of the division of the second coordinate system into partial areas in order to be able to control the processing of the information that is recorded by means of the first position-coding pattern.

Another problem with the coding pattern described above and other similar coding patterns is that a base that is provided with this pattern can be copied while retaining its functionality. This property is undesirable for the party that is selling bases with the coding pattern. There is therefore a need to provide the base with coding patterns that are copy protected.

25 Summary of the Invention

A first object of the present invention is to propose a solution to the problem described above, namely that many digital templates are required to make possible flexible information processing.

30 This object is achieved completely or partially by a product according to claim 1, a method for coding according to claim 15, a device for coding according to claim 17, a method for decoding according to claim 18 and a device for decoding according to claim 20.

35 The invention thus relates among other things to a product that is provided with a first information code, which is arranged to redundantly code at least one first

information element using a plurality of marks. At least one additional information element is coded on the product by at least one of said plurality of marks being omitted on the product.

5 As there is a redundancy in the first information code, it is possible to decode the first information element even if one or more marks are missing. This property is utilized in the invention in such a way that at least one mark is intentionally omitted with the aim of coding
10 at least one additional information element.

 The additional information element or elements can, for example, be utilized to indicate or activate fields on a base that is provided with a position-coding pattern for digital recording of handwriting.

15 A second object of the present invention is to propose a solution to the problem of copying.

 This object is achieved completely or partially by a product according to claim 21 and a method for producing a product according to claim 29.

20 The invention thus relates, in addition, among other things to a product that is provided with an information code that codes at least one first information element by means of a plurality of marks, the product being characterized by it being provided, in addition, with at least
25 one interference mark that has optical characteristics that are different from those of said plurality of marks.

 By allocating the interference mark suitable optical characteristics that differ from those of the ordinary information marks, it is possible to ensure that the
30 interference mark is not detected by the decoding device that is used for decoding the information code. Alternatively, it can be ensured that the decoding device can distinguish the ordinary information marks from the interference mark so that it can disregard the interference
35 mark during the decoding. Accordingly, the interference mark will not interfere with the decoding of the information code on the original product. However, if

the product is copied, all the marks will, of course, have the same optical characteristics and the interference mark will thereby also be detected by the decoding device. If the interference mark is suitably placed and/or designed, it can interfere with the decoding device so that this cannot decode the information code on a copied product, whereby copy protection is thus obtained.

Brief Description of Drawings

In the following, the present invention will be described in greater detail by way of examples, with reference to the accompanying drawings, in which

Fig. 1 shows schematically a known first information code.

Figs 2a and 2b show the first information code decoded into a bit matrix that codes an x-coordinate and a bit matrix that codes a y-coordinate.

Figs 3a and 3b show schematically two examples of patterns in accordance with which marks can be omitted in the first information code shown in Fig. 1 without the decodability thereof being lost.

Fig. 4 shows the same pattern as in Fig. 3a for omitting marks, but the pattern is displaced in another way in relation to the first information code.

Figs 5a and 5b show how the information code in Fig. 3b and 3a respectively can be divided into cells.

Fig. 6 shows a form in which different fields can be indicated by the omission of marks.

Fig. 7 is a schematic block diagram for a coding device for coding an information code.

Fig. 8 is a flow chart that shows how an information code can be coded.

Fig. 9 shows schematically a user unit that can be used for decoding an information code.

Fig. 10 is a flow chart that shows how an information code can be decoded.

Figs 11a-11c show an information code without copy protection, the same information code with copy protec-

tion and the information code with copy protection after being copied.

Detailed Description of Examples

In the following, an example of a known information code in which the present invention can be utilised is first described with reference to Figs 1 and 2. There follows a description with reference to Figs 3-10 of how additional information can be coded in this information code by the omission of marks in the code. Finally, there is a description with reference to Fig. 11 of how the information code can be protected from copying by the omission of marks in the code and the addition of interference marks.

Fig. 1 shows an example of an information code in the form of a position-coding pattern of the type that is described in WO 01/26032 that was mentioned by way of introduction. The position-coding pattern is constructed of marks 1, which here are the shape of circular dots. Each mark is displaced in any one of four different directions in relation to a reference position or nominal position 2, which consists of an intersection between raster lines 3 in a raster. The raster can be invisible, but in Fig. 1 the raster is shown by broken lines for the sake of clarity.

Each mark 1 represents a value 0-3 depending upon in which direction the mark is displaced in relation to the nominal point 2. The value 0 is coded by displacement to the right, 1 by displacement upwards, 2 by displacement to the left and 3 by displacement downwards. The different possible values 0-3 for the marks can be expressed in binary form as bit pairs (0,1; 0,0; 1,0; and 1,1). The first bit in the bit pair corresponding to a mark's value is used for coding position information in the x-direction and the second bit is used for coding position information in the y-direction. The position coding is thus carried out separately in the x-direction and the y-direction, but the graphical coding is carried out

using marks that are the same for the x-direction and the y-direction.

Each set of 6*6 adjacent marks in the position-coding pattern codes a position in the form of an x-coordinate and a y-coordinate. More specifically, each set of 6*6 marks can be translated into a 6*6-bit matrix that codes an x-coordinate and a 6*6-bit matrix that codes a y-coordinate for the position. Figs 2a and 2b show an x-bit matrix 4 and a y-bit matrix 5 that were decoded from the information code in Fig. 1.

In addition, consider the x-bit matrix 4. This can be divided into six columns, each with six bits. Each sequence of bits in a column constitutes a partial sequence in a 63 bit long cyclic main number sequence that has the property that if a partial sequence is extracted that is six bits in length, this has an unambiguously determined location in the main number sequence. The six columns can thus be translated into six position numbers P0-P5, that correspond to six locations in the main number sequence. Between these six position numbers, five difference numbers D0-D4 can be created in pairs, which code the x-coordinate. For a certain x-coordinate, the position numbers P will vary depending upon the y-coordinate. The difference numbers D are, on the other hand, the same regardless of the y-coordinate, as the position numbers P always vary in accordance with the main number sequence that is repeated cyclically in the columns in the total position-coding pattern.

In a corresponding way, six rows in the y-bit matrix define six position numbers P'0-P'5 in the main number sequence. These six position numbers define five difference numbers D'0-D'4, that code the y-coordinate.

The difference numbers D and D' can, for example, code the x-coordinate and the y-coordinate respectively by constituting a partial sequence of an x-difference number sequence and a y-difference number sequence respectively, each of which has the property that a par-

tial sequence consisting of five numbers has an unambiguously determined location in the difference number sequence. Another principle for how the difference numbers D and D' code the x-coordinate and the y-coordinate respectively is described in the above-mentioned
5 WO 01/26032.

Even though in principle no more than 6*6 marks are required for defining a position, 8*8 marks are used advantageously for the decoding. The fact is that the
10 above-mentioned 63 bit long main number sequence can be designed in such a way that none of the 8 bit long partial sequences that are included in the main number sequence occurs backwards and inverted or with one bit inverted in the main number sequence. This property of
15 the main number sequence can be used to determine how a recorded image of the position-coding pattern, which, after all, looks essentially identical whether it is rotated through 0, 90, 180 or 270 degrees, is oriented. In addition, it can be used to correct an incorrectly
20 decoded bit in an eight-bit long column or row in the x- or y-bit matrix 4,5.

With decoding using 8*8 marks, the position-coding pattern thus contains redundant information, which means that it is possible to decode positions correctly even
25 though one or more marks are in an incorrect position in the position-coding pattern, are missing in the position-coding pattern, are decoded incorrectly or are missed during the decoding. This property can in turn be utilized for coding additional information in the position-coding pattern.
30

As mentioned above, the position-coding pattern comprises a plurality of nominal positions 2 that consist of intersections between raster lines 3 in a raster. In this example, these nominal positions 2 with associated marks
35 1 code position information, but can also, as has been described above, code other information. Therefore in

the following the term "first information code" is used instead of position-coding pattern.

Thanks to the redundancy in the first information code, marks that belong to certain of the nominal positions can be omitted while retaining the ability to decode the first information code. All the marks can, of course, not be omitted, only a subset or a selection of these. The number of marks that can be omitted and for which nominal positions are determined by the error-correcting properties of the first information code. The subset of the first information code's nominal positions for which marks can be omitted constitutes a basis for a second information code for coding additional information in addition to that which is coded by the first information code. In the following the combination of the first information code and the second information code is called just the information code.

Figs 3a and 3b show two different examples of which nominal positions 2 in the first information code can have their associated mark omitted while retaining the ability to decode the first information code. The nominal positions 2 that belong to the first information code are marked by circles, which can be filled in or not, while the nominal positions 6 that belong to the second information code are marked by filled-in circles.

In the example in Fig. 3a, at least four marks can thus be omitted in each set of 8*8 marks, while in the example in Fig. 3b eight marks can be omitted in each set of 8*8 marks. In neither case is more than one mark of eight consecutive marks in a row or a column omitted as the error-correcting properties of the first information code are such that a maximum of one bit error in eight bits can be corrected.

It should be pointed out that the examples in Figs 3a and 3b are just examples. With a first information code with the error-correcting properties described above, it is possible to remove marks in other

arrangements or patterns than those that are shown in Figs 3a and 3b. If a first information code with other error-correcting properties is taken as a starting point, marks can, of course, be removed in other arrangements or patterns.

The second information code can code the additional information in various ways.

A commonplace way is to either retain or omit marks for all nominal positions in the second information code. In this way, two different information values can be coded.

Another way is to omit marks in any one of a plurality of predetermined patterns or arrangements for omitting marks in the second information code. The information is then coded dependent upon which of this plurality of predetermined patterns is used. Examples of predetermined patterns can be those that are shown in Figs 3a and 3b. Other examples can be based on those in Figs 3a and 3b, but where the choice is made to retain the marks in certain nominal positions, for example in half of the nominal positions in a regular pattern.

An additional way is to omit all marks according to any one of the possible patterns for omitting marks and to code information dependent upon the relative placings of the first information code and the second information code. More specifically, the first omitted mark in the second information code and thereby all the second information code can be placed differently in relation to the origin of the first information code. This is illustrated in Fig. 3a and Fig. 4 that show two different possible relative placings of the first information code and the second information code.

Yet another way is to divide the first information code into cells, and let information be coded by the absence and presence of marks in the cells in the nominal positions that belong to the second information code. Fig. 5a shows more specifically how the first

information code can be divided into fixed cells 40 that are 8*8 marks in size. The cells are normally not marked on the base on which the first information code has been applied, but are virtual cells. For the sake of clarity, however, they are marked in Fig. 5a by broken lines 41.

Fig. 5a shows, in addition, the nominal positions 6 that constitute part of the second information code. These nominal positions 6 form a pattern according to Fig. 3b. Within each cell 40 there are eight nominal positions that constitute part of the second information code. If each such nominal position codes the value 0 or 1 depending upon whether the mark is present or has been omitted, each cell can code 2^8 different values, that is 256 different values.

Cells of a different size and shape can be used. In Fig. 5a, for example, cells can be used with 4*8 nominal positions in the first information code, each of which then contains four nominal positions in the second information code, which can thus code 2^4 different values.

Fig. 5b shows yet another example of division into cells 40. This example is based on Fig. 3a. In this example, the cells are rotated in relation to the raster for the first information code. In addition, each cell contains four nominal positions 6 which belong to the second information code. Each cell can thus code a maximum of 2^4 different values, that is 16 different values.

As shown in Fig. 5a, the cells do not overlap each other, but are fixed in relation to the first information code, which means that their placings are simple to determine as soon as the first information code has been decoded. In this case, it is assumed, however, that the first information code codes position information.

In the case shown in Fig. 5b, the placings of the cells are determined by at least one omitted dot being identified. On the basis of this dot, the nominal positions 6 that form the basis for the second information code can be identified since their relative placing in

the first information code is known. In addition, the coordinates that are defined for the nominal position associated with the omitted mark can be determined. As has been described above, the coordinates for a position are coded by the marks that belong to each set of 8*8 nominal positions in the first information code. These coordinates relate to the nominal position at the top left in the set. The coordinates for the nominal position 6 or the position of the nominal position 6 that is associated with the omitted mark can thus be determined. As the rotation of the cells and their placing in relation to the first information code is known, the cells 40 can be defined in any part of the information code, when an omitted mark has been identified and the coordinates for this omitted mark have been determined.

The decoding of the first information code is based on 8*8 marks to make possible error correcting. If a decoding device records an image of the information code that does not comprise more than precisely 8*8 marks, it is not certain that the marks recorded in the image comprise a whole fixed cell for decoding the second information code. If all or most of the cells code the same value, this constitutes no problem, however, as the decoding can then be carried out on the basis of parts of several adjacent cells in the image.

If the decoding device records an image with at least 15*15 marks, a whole cell will always be included within the recorded marks. In addition, a cell value can be determined if required, using information from several images recorded by a decoding device.

The second information code can code different types of information. It can be used for superimposing a second information layer on the first information layer coded by the first information code. The second information layer can, for example, contain height information which is

related to positions on a map, which positions are coded by means of the first information code.

In addition, the second information code can be used to indicate or activate different fields with different functions on a physical base which is provided with a first information code. The indication and/or activation can be carried out in a corresponding way to that described in SE 0103029-5 and SE 0201846-3 mentioned by way of introduction.

Fig. 6 shows schematically an e-mail form 60 which is divided into three different fields with different functions. A first field 61 is intended for message information that is to be recorded and processed only as a sequence of coordinates. A second field 62 is intended for address information that is to be interpreted using ICR (Intelligent Character Recognition). A third field 63 constitutes a so-called send box that indicates that one or more coordinates that are recorded from this area are to be interpreted as an instruction that message information recorded from the first field is to be sent to the address recorded from the second area.

The whole e-mail form 60 is provided with the first information code. The three different fields can be distinguished by means of the second information code, in a corresponding way to that described in the above-mentioned SE 0103029-5. For example, the second information code can be divided into cells that code different values in the three different fields or the pattern of omitted marks can be displaced in different ways relative to the first information code in the three fields. In this example, the whole e-mail form 60 is thus divided into fields, which are provided with the second information code, which accordingly extends over the whole e-mail form. According to another alternative, the send box 63 and address field 62 can be defined as fields that are indicated by means of the second information code, while the remaining part 61 of the form is regarded as a back-

ground where no marks are omitted and where accordingly only the first information code is to be found.

As yet another example, the second information code can be position coding in a corresponding way to that described in SE 0201846-3. The first information code is then suitably divided into cells, each of which codes four different values. The position coding can then be carried out in the way that is described in the above-mentioned WO 01/26032, whereby the cells with their four different possible values correspond to the marks in WO 01/26032. The second information code then codes coordinates for points in a second coordinate system or on a second imaginary surface so that the position information can be separated from the position information that is coded by the first information code. The number of cells that code coordinates for a point in the second coordinate system can be considerably less than the number of marks in the first information code that code coordinates for a point. Using a position-coding second information code that is used for indicating a field on a physical base, the so-called pen point displacement problem can be solved. In a pen that has a pen point that is used to make pen strokes on a physical base with an information code and a sensor that is used to record the information code, the pen point and the sensor can be displaced in relation to each other. It can then occur that the user points with the pen point in one field with a particular function, but that the sensor, due to the displacement, records the information code in another field. If the second information code is position coding and extends outside the actual field, the decoding device can determine where the pen point is located and whether it is inside or outside the actual field.

The information code described above can be applied on a physical base or product. It can, for example, be printed out on a sheet of paper.

Now follows a description of how the coding of the information code can be carried out in a coding device, which is illustrated schematically in Fig. 7. The coding device, which for example can be realized by means of an ordinary personal computer, comprises a processing unit 5 70 which in addition to the actual processor 71 comprises a working memory 72 and a program memory 73 which stores a program for producing the information code. The coding device comprises, in addition, an input means 74 which 10 makes it possible for a user to input information into the processor concerning a required layout for the information code on a physical base. The input means 74 can, for example, be a keyboard or a mouse or some other corresponding input unit that is normally used together with 15 a computer. In addition, a unit 75 can be connected to the coding device which, on the basis of a digital representation of an information code, applies a graphical representation of the information code on a product. The unit can, for example, consist of a printer that prints 20 out the information code on a sheet of paper or alternatively be some form of printing device.

With reference to the flow chart in Fig. 8, there now follows a description of how the coding can be carried out in the case when the additional information is 25 coded by the first information code being divided into cells and by these being allocated values for indication of different fields.

In a first step 80, the processor 71 in the coding device receives an indication entered by the user of 30 which coordinate area is to be coded by the first information code. The indication can consist of a selection from predefined coordinate areas or an explicit indication of an area in the form of, for example, a pair of coordinates defining the top left corner of the area and 35 a width and a height on the page. In association with this step, space is allocated in the working memory 72 for storage of a digital representation of the informa-

tion code. For each mark that is included in the information code, the processor thereafter calculates a value that indicates the placing of the mark, in step 81. How such a calculation can be carried out is described in the above-mentioned WO 01/26032. The value of the respective mark is stored in a first matrix in the working memory 72. The value can, for example, be given as a number between 0 and 3, where 0 means that the mark is displaced to the right from its nominal position, 1 that it is displaced upwards, 2 that it is displaced to the left and 3 that it is displaced downwards.

After this the processor 71 receives an indication of at least one field of a certain type that is to be indicated by means of the second information code and the placing of this field within the coordinate area that is coded by the first information code, step 82.

On the basis of the indication in step 82, the processor determines a second matrix that defines the cell values for the indicated field or fields. The indicated fields can, as has been described above, cover all or a part of the coordinate area that is to be coded by the first information code. The second matrix constitutes the input signal to the next step in the coding. In the following step, the processor 71 determines, on the basis of the cell values defined in the second matrix and in accordance with a predetermined algorithm that states how the cell values are coded, whether each of the marks that correspond to nominal positions in the second information code is to remain in the information code or is to be omitted, step 83. More specifically, the processor determines a third matrix that is the same size as the first matrix, in which it allocates the marks that are to be omitted the value 4 and the other marks the value 0.

Finally, a fourth matrix is created as the sum of the first matrix and the third matrix. Marks that are to be found in the information code have a value in the

fourth matrix that codes their placing. Marks that are to be omitted have a value that is 4 or higher.

When the coding is completed, the information code can be printed out if so required, using the printer 75.

5 The fourth matrix can, for example, be sent to a program that generates a PostScript file for printout on the printer.

Fig. 9 shows an example of how a hand-held user unit which can be used as a decoding device, can be realized.

10 It comprises a casing 91 which is approximately the same shape as a pen. In the end of the casing there is an opening 92. The end is intended to abut against or to be held a short distance from the surface from which the position-coding pattern is to be recorded.

15 The casing contains principally an optics part, an electronic circuitry part and a power supply.

The optics part comprises at least one light-emitting diode 93 for illuminating a partial area of the surface with the information code and a light-sensitive
20 area sensor 94, for example a CCD or CMOS sensor, for recording a two-dimensional image of the information code on the surface. If required, the device can also contain an optical system, such as a mirror and/or lens system. The light-emitting diode can be an infrared
25 light-emitting diode and the sensor can be sensitive to infrared light.

The power supply for the device is obtained from a battery 95, which is mounted in a separate compartment in the casing. It is also possible to provide the power
30 supply via a cable from an external power source (not shown).

The electronic circuitry part contains a processing unit 96 with a processor which is programmed to record images from the sensor 94 and to decode the information
35 code in these images, plus a working memory and a program memory. In addition, the processor can be programmed to carry out certain operations on the basis of the decoded

information. The processor can, for example, send information to a specific address that is included in the decoded information, as a result of it interpreting and processing the decoded information.

5 For this purpose, information is stored in the user unit which makes it possible for this to determine how the decoded information is to be processed/interpreted. The information can, for example, include which fields are coded by which cell values and/or by which displacements of the second information code relative to the
10 first information code and/or by which specific patterns of omitted marks.

 In this embodiment, the user unit also comprises a pen point 97, with the aid of which the user can write
15 ordinary pigment-based writing on a base from which the coding pattern is to be recorded. The pen point 97 is extendable and retractable so that the user can control whether or not it is to be used. In certain applications, the user unit does not need to have a pen point at all.

20 The pigment-based writing is suitably of a type that is transparent, that is non-absorbent, to infrared light and the marks suitably absorb infrared light. By using a light-emitting diode which emits infrared light and a sensor which is sensitive to infrared light, the detection of the pattern can be carried out without the above-
25 mentioned writing interfering with the pattern.

 The user unit can also comprise buttons 98, by means of which the device can be activated and controlled. It also has a transceiver 99 for wireless transmission of
30 information to and from the device, for example using infrared light, radio waves or ultrasound. The user unit 2 can also comprise a display 900 for displaying recorded and/or processed information.

 The user unit can be divided between different physical casings, with a first casing containing components
35 which are required for recording images of the coding pattern and for transmitting these to components which

are contained in a second casing and which decode the coding pattern in the recorded image or images.

An example of how the decoding of the information code described above can be carried out will now be described with reference to the flow chart in Fig. 10. The example is based on the second information code coding information by means of cell values and on the information code that covers the base comprising the second information code.

10 In a first step 100, the processor unit 96 in the user unit receives a digital representation of the information code that the sensor 94 recorded locally at the end of the user unit. The processor unit 96 thereafter decodes the first information code by identifying
15 the marks in the digital representation, determining the virtual raster and the placing of the marks in relation to this and by calculating a pair of coordinates, step 101, on the basis of the placing of a predetermined number, for example 8*8, of the identified marks. The decoding
20 ing of the first information code comprises error correction of the nominal positions 6 that do not have marks because they are in the second information code. A more detailed description of how the first information code can be decoded is to be found in WO 01/26032. A description
25 tion of how the virtual raster can be determined is also to be found in WO 01/26034, WO 01/75783 and SE 0104088-0, which are all assigned to the same Applicant as the Applicant for the present application.

When the first information code has been decoded,
30 the processor unit 96 can determine, in step 102, how the cells that are used for the decoding of the second information code are placed, since the placing of the cells is fixed in relation to the first information code. When the placing of the cells has been determined, the
35 processor unit can, in addition, determine which nominal positions 6 in the second information code belong to the respective cells and it can thus determine which of these

nominal positions have an associated mark and which do not have an associated mark and thereby determine the cell value, step 103, for example by means of a table that is stored in the memory of the user unit. Alternatively, the cell value can be given directly by an omitted mark coding a first bit value and a mark that is present coding a second bit value, the cell value being determined from the combination of bit values. Steps 102 and 103 thus correspond to a decoding of the second information code.

When the second information code has been decoded, the processor unit 96 can determine which field is coded by the second information code, step 104. It thereafter processes the pair of coordinates in a way that depends upon the detected field, step 105. If, for example, the cell value corresponds to the first field 61 in the e-mail form 60 in Fig. 6, the pair of coordinates decoded from the first information code is processed in the memory as a pair of coordinates belonging to a normal pen stroke on the surface. If instead, the processor unit 96 determines that the cell value corresponds to the second field 62, then the pair of coordinates will be stored for later ICR interpretation (ICR = Intelligent Character Recognition). If, finally, the processor unit determines that the cell value corresponds to the "send" box 63, the pair of coordinates will be processed as an instruction to send previously stored message information to an address that was ICR interpreted from the second field 62. The description of which fields are coded by the different cell values can be stored in the memory of the user unit.

The description above is based on decoding of the second information code when this codes information by means of cell values. If the second information code instead codes information by a predetermined pattern of omitted marks being displaced in various ways in relation to the first information code, then the processor unit 96

instead detects one or more nominal positions 2 in the first information code that do not have marks. With knowledge of the pattern for omission of marks, the processor unit 96 can thereafter calculate how the second information code is displaced relative to the first information code. More specifically, the processor unit 96 determines the positions of the omitted marks in relation to the origin and determines from these what value is coded by the second information code.

10 If the second information code instead codes information by the use of one of a plurality of predetermined patterns for the omission of marks, then the processor unit detects which nominal positions 2 do not have marks in the first information code. As a result, the processor
15 unit 96 can, for example, determine whether the pattern of omitted dots is the one shown in Fig. 3a or 3b, or some other predetermined pattern and thereby determine what value is coded by the second information code.

20 The second information code can also code information on the basis of a combination of cell values and pattern displacement.

As described above, the idea of omitted dots can also be used to achieve copy protection for sheets of paper with information code of the type described above
25 or a similar type.

The copy protection is based on the fact that marks that are normally included in the first information code are omitted in the way described above in association with the second information code, but that interference marks are associated with the nominal positions 6 for which the ordinary information marks are omitted. The interference marks are printed with different optical characteristics to those of the ordinary information marks, more specifically with such optical characteristics that are not visible to the decoding device that
30 decodes the information coding pattern. In addition, the interference marks are placed in relation to the asso-
35

ciated nominal position in a manner that is different to the manner in which the omitted mark would have been placed. The placing is preferably mirror-inverted, as then both the corresponding bit in the x-bit matrix and
5 the corresponding bit in the y-matrix will be incorrect.

As the interference mark is invisible to the decoding device, this will not detect the interference mark, but will carry out the decoding as if the mark was omitted. As a result of redundancy in the information code,
10 the decoding device can decode the information correctly, in spite of certain marks being missing. As the decoding device detects in which position the mark is missing, it also knows which bit in the corresponding column and row is to be error corrected. As the 8-bit long partial
15 sequences in the main number sequence do not occur with one bit inverted, it is simple for the decoding device to determine which bit is correct in the position where the mark is missing.

If, for example, a sheet of paper, which is provided
20 with this type of copy-protected information code, is copied, all the marks will have the same optical characteristics. All the marks will then be detected by the decoding device, but the interference marks will result in 8-bit sequences appearing during the decoding that are
25 not found in the main number sequence.

The decoding device will be able to detect that the decoded bit matrices contain errors or that the decoded position is improbable in relation to the adjacent decoded positions, but will not be able to correct the error
30 or errors since, unlike when a mark is omitted, it does not know which bits are to be corrected.

The copy protection is illustrated in Figs 11a-11c. Fig. 11a shows a set of 8*8 marks 1 that code a position. Fig. 11b shows the same set of 8*8 marks as in Fig. 11a,
35 but with omitted marks for certain nominal positions. Fig. 11b also shows by dotted circles S how interference marks, which are invisible to a decoding device that can

decode the information code, are placed. A comparison of Fig. 11a and Fig. 11b shows clearly that the placing of the interference marks is mirror-inverted in relation to the placing of the omitted marks. Fig. 11c illustrates
5 how the 8*8 set in Fig. 11b appears after copying.

The normal marks can be printed with carbon-based black pigment and are detected by an infrared-sensitive sensor in a decoding device. The interference marks can be printed with a black pigment that does not contain
10 carbon. Both carbon-based black pigment that absorbs infrared light and non-carbon-based black pigment that does not absorb infrared light are available on the market. The non-carbon-based pigment does not need to be black, but can instead appear black and can be made up of
15 a combination of colours such as cyan, magenta and yellow during the printing process.

Examples of possible black carbon-based and non-carbon-based pigments are described in US 5,145,518, US 5,208,630, US 5,225,900, US 5,256,193, US 5,271,764,
20 US 5,291,243 and US 5,286,286.

In the example with a detector that is sensitive to infrared radiation, the essential factor concerning the copy protection is that when the interference marks are copied, they are changed from not absorbing infrared
25 radiation to absorbing infrared radiation.

As another example, the copy protection can be realised by letting the ordinary marks be fluorescent in, for example, ultraviolet light, while the interference marks are not fluorescent in the same light. When they
30 are copied, the non-fluorescent interference marks are changed to being fluorescent, so that all the marks have essentially the same optical characteristics.

A further variant could be to use a colour-sensitive decoding device and to let the ordinary marks be a first
35 colour and the interference marks a second colour. Such copy protection can, however, be circumvented by using a colour copier.

It should be pointed out that it is of no importance whether the ordinary marks and the interference marks can be distinguished by the naked eye. What is important is that the marks on an original can be distinguished by a decoding device which is arranged to detect the information code, but that after copying they cannot be distinguished by the decoding device.

In addition, as has been pointed out above, the interference marks do not need to be invisible to the decoding device on the original. It is sufficient for the decoding device to be able to distinguish between the ordinary information marks and the interference marks.

The coding of the information code with built-in copy protection can be carried out using the same coding device and in essentially the same way as described above concerning the coding of the second information code. When printing the information code, however, the values in the fourth matrix are interpreted as follows:

- 0 = normal mark displaced to the right
- 1 = normal mark displaced upwards
- 2 = normal mark displaced to the left
- 3 = normal mark displaced downwards
- 4 = interference mark displaced to the left
- 5 = interference mark displaced downwards
- 6 = interference mark displaced to the right
- 7 = interference mark displaced upwards

The actual printout of the information code can be carried out either in one pass, for example with an ink-jet printer where different marks can be printed out using different pigments, or in two passes, for example in a printing process with different pigments in the different passes.

The example above is based on marks being omitted for certain nominal positions in the first information code and on interference marks being inserted in these

positions. Another possible solution is only to insert interference marks, without omitting marks in the first information code. In this case, however, the interference marks must be inserted closer together than in the case
5 where marks are omitted, since one known incorrect mark can be corrected by the user unit. Several incorrect marks are, however, more difficult to correct, as there are several different possibilities for the correction.

The copy protection can be introduced over all or
10 parts of an information code. If the information code contains the "send" box 63 in Fig. 6, it can be sufficient to introduce the copy protection in this, as it will then be impossible to send information using the "send" box.

15 It should also be pointed out that the copy protection can be combined with the second information code, with interference marks being inserted in the nominal positions that are included in the second information code and that do not have an associated mark.

20 Alternative Embodiments

It has been described above how additional information can be coded in an information code by the omission of marks. The description has been given with reference to a special information code. The idea can, however, be
25 applied to other types of information codes which redundantly code at least one first information element by means of a plurality of marks. Examples of such other information codes are to be found in, for instance, WO 00/73983, WO 99/50787 and US 6,208,771.

30 It has also been described above how copy protection can be achieved by the insertion of an interference mark in an information code. The description has been given with reference to a special information code. The idea can, however, be applied to other information codes
35 which code at least one first information element by means of a plurality of marks. Examples of such infor-

mation codes are to be found in, for instance, WO 00/73983, WO 99/50787 and US 6,208,771.

5 The information codes described above have a raster that creates a square grid. This is not necessary. The raster can, for example, be triangular or hexagonal, with the nominal positions consisting of points where the raster lines intersect.

10 In the description above, the value of each mark is coded by its placing in relation to a reference point. In other applicable information codes other parameters, such as the shape or colour or size of the mark, can be used to code the value of the mark.

CLAIMS

1. A product which is provided with a first information code which is arranged to redundantly code at least one first information element by means of a plurality of marks, characterised in that at least one additional information element is coded on the product by at least one of said plurality of marks being omitted on the product.

2. A product according to claim 1, in which the first information code comprises a plurality of first reference positions and in which each of said plurality of marks is associated with one of said first reference positions.

3. A product according to claim 2, which is provided with a second information code that comprises a plurality of second reference positions, which constitute a selection from said plurality of first reference positions, wherein said at least one additional information element is coded by the second information code by at least one of said plurality of second reference positions not having an associated mark.

4. A product according to claim 3, wherein the first reference positions define a first virtual raster, which has first raster lines and in which the first reference positions consist of points at which the first raster lines intersect.

5. A product according to claim 3 or 4, wherein said at least one additional information element is coded by how said plurality of second reference positions are placed in relation to said plurality of first reference positions.

6. A product according to any one of claims 3-5, wherein each second reference position in the second information code represents a first value if it has an

associated mark and a second value if it does not have an associated mark.

7. A product according to claim 6, wherein the second reference positions form at least one cell with
5 at least two second reference positions and wherein said at least one cell has a cell value that is determined by which values are represented by the second reference positions included in the cell.

8. A product according to claim 7, wherein said at
10 least one cell has a fixed placing in relation to the first information code.

9. A product according to claim 7 or 8, wherein said at least one additional information element is coded by the cell value of said at least one cell.

10. A product according to any one of the preceding
15 claims, wherein said at least one additional information element represents a position.

11. A product according to any one of the preceding
20 claims, wherein said at least one first information element represents a position.

12. A product according to any one of the preceding
claims, wherein said at least one first information element is coded by means of variation of a parameter for the marks.

13. A product according to claim 12, wherein each
25 mark in the first information code has a value that is determined by said parameter.

14. A product according to claim 12 or 13, wherein
30 said parameter is one of the following: placing of the mark, shape of the mark, colour of the mark and size of the mark.

15. A method for coding, which method comprises
redundantly coding at least one first information element
in an information code by allocating a value to each of a
35 plurality of marks, which value indicates how the mark is to be represented graphically when applying the information code on a product, and comprises coding at least one

additional information element in the information code by allocating a value to at least one of said plurality of marks, which value indicates that the mark is to be omitted during said application of the information code on a product.

16. A computer program product, which comprises program code that is arranged to carry out a method according to claim 15 when it is executed by a computer.

17. A device for coding an information code, comprising a processing unit which is arranged to redundantly code at least one first information element in an information code by allocating to each of a plurality of marks a value that indicates how the mark is to be represented graphically when applying the information code on a product, and to code at least one additional information element by allocating to at least one of said plurality of marks a value that indicates that the mark is to be omitted during said application of the information code on a product.

18. A method for decoding an information code, comprising locating a plurality of marks in a digital representation of the information code, determining the values of the located marks for decoding at least one first information element, identifying at least one mark omitted in the information code and decoding at least one additional information element by means of said at least one additional information element.

19. A computer program, which comprises program code that is arranged to carry out a method according to claim 18 when it is executed by a computer.

20. A device for decoding an information code, comprising a processing unit which is arranged to locate a plurality of marks in a digital representation of the information code, to determine the values of the located marks for decoding at least one first information element, to identify at least one mark omitted in the information code and to decode at least one additional infor-

mation element by means of said at least one additional information element.

21. A product which is provided with an information code that codes at least one first information element by means of a plurality of marks, characterised in that the product is further provided with at least one interference mark which has optical characteristics that differ from those of said plurality of marks.

22. A product according to claim 21, wherein said plurality of marks are arranged to be detected by a decoding device, using which said at least one interference mark is not detectable due to its optical characteristics.

23. A product according to claim 21 or 22, wherein said plurality of marks absorb infrared light and said at least one interference mark does not absorb infrared light.

24. A product according to any one of claims 21-23, wherein copy protection is achieved by means of said at least one interference mark.

25. A product according to any one of claims 21-24, wherein the product comprises at least one interference mark for each first information element that is coded by the information code.

26. A product according to any one of claims 21-25, wherein the information code comprises a plurality of reference positions, wherein each of said plurality of marks is associated with one of said reference positions and wherein each information element is coded by a set of a predetermined number of reference positions with associated marks.

27. A product according to claim 26, wherein each set has at least one reference position for which the associated mark is replaced by an interference mark.

28. A product according to claim 27, wherein each mark represents a value and each interference mark repre-

sents a different value to that of the mark that it replaces.

29. A method for producing a product with an information code that codes at least one first information element by means of a plurality of marks, comprising
5 applying said plurality of marks on the product and applying at least one interference mark on the product, which interference mark has optical characteristics that differ from those of said plurality of marks.

1/9

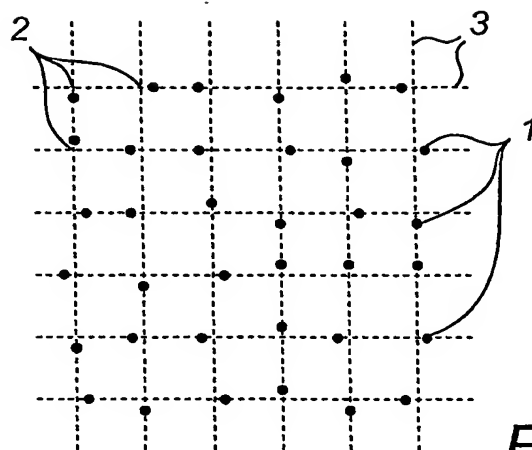


Fig. 1

4

$$\begin{bmatrix} 1 & 0 & 1 & 1 & 0 & 1 \\ 0 & 1 & 1 & 0 & 1 & 0 \\ 0 & 1 & 0 & 1 & 0 & 1 \\ 1 & 1 & 0 & 0 & 0 & 0 \\ 1 & 1 & 1 & 0 & 1 & 0 \\ 0 & 1 & 0 & 0 & 1 & 1 \end{bmatrix}$$

$\Downarrow \Downarrow \Downarrow \Downarrow \Downarrow \Downarrow$
 $P_0 \ P_1 \ P_2 \ P_3 \ P_4 \ P_5$
 $\underbrace{\hspace{1.5cm}}_{D_0 \ D_1 \ D_2 \ D_3 \ D_4}$
 $\underbrace{\hspace{1.5cm}}_x$

Fig. 2a

5

$$\begin{bmatrix} 1 & 1 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 & 1 & 1 \\ 1 & 0 & 0 & 1 & 1 & 1 \\ 0 & 1 & 1 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 1 \\ 1 & 1 & 1 & 0 & 1 & 0 \end{bmatrix} \Rightarrow \left. \begin{array}{l} P'_0 \\ P'_1 \\ P'_2 \\ P'_3 \\ P'_4 \\ P'_5 \end{array} \right\} \left. \begin{array}{l} D'_0 \\ D'_1 \\ D'_2 \\ D'_3 \\ D'_4 \end{array} \right\} y$$

Fig. 2b

2/9

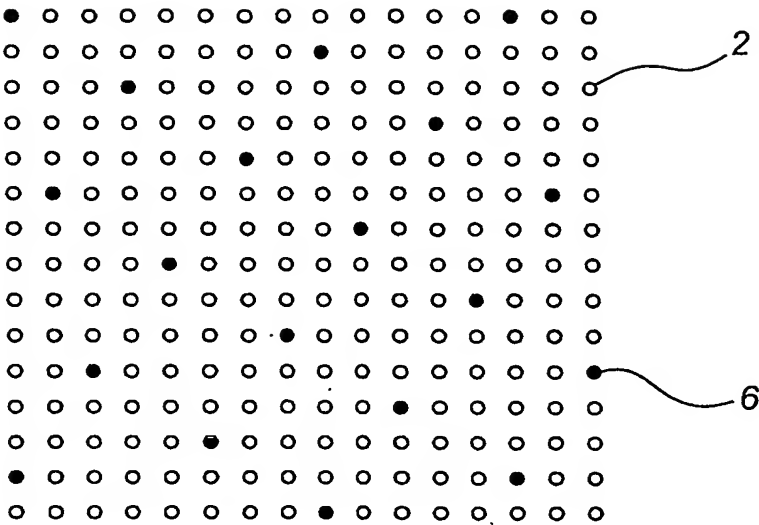


Fig. 3a

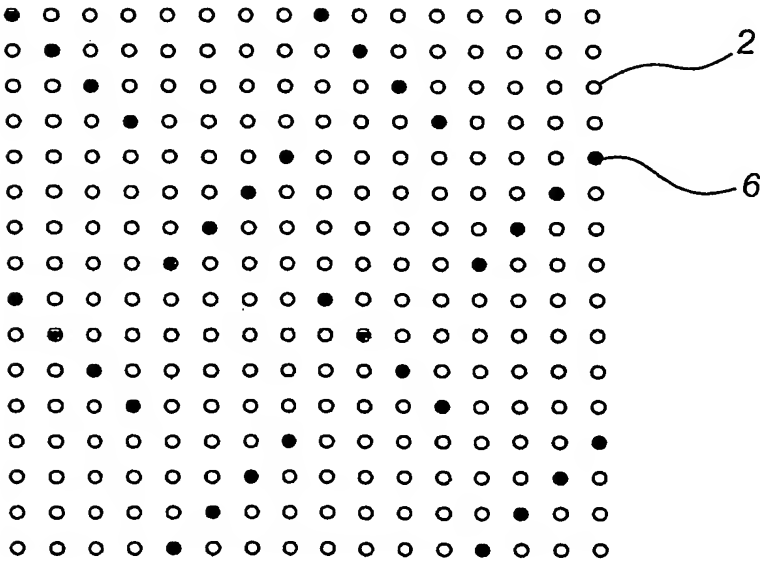


Fig. 3b

3/9

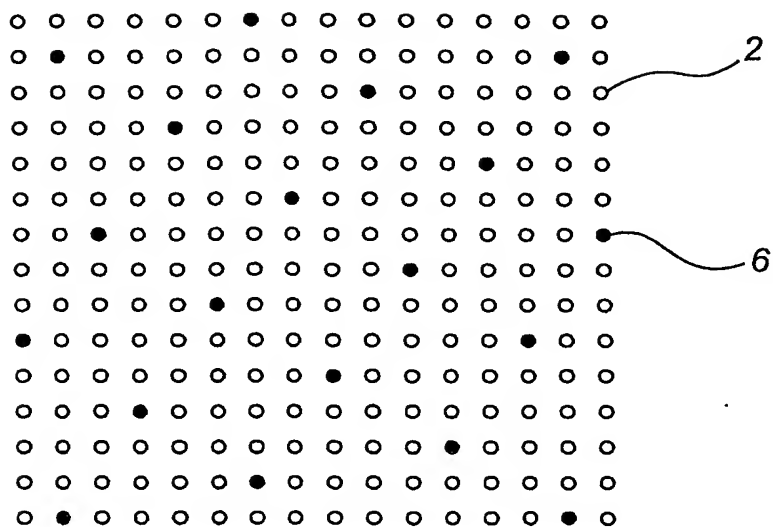


Fig. 4

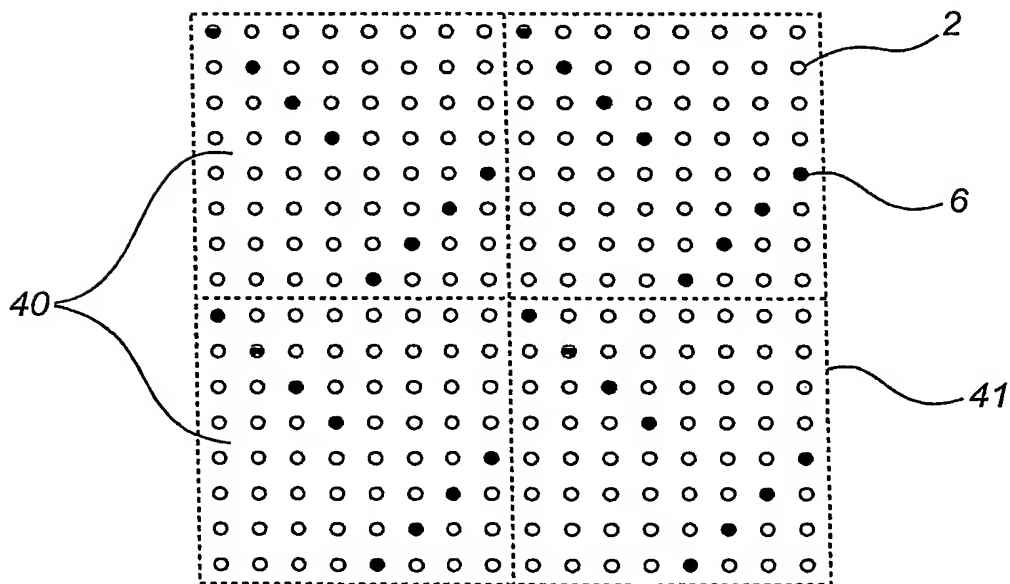
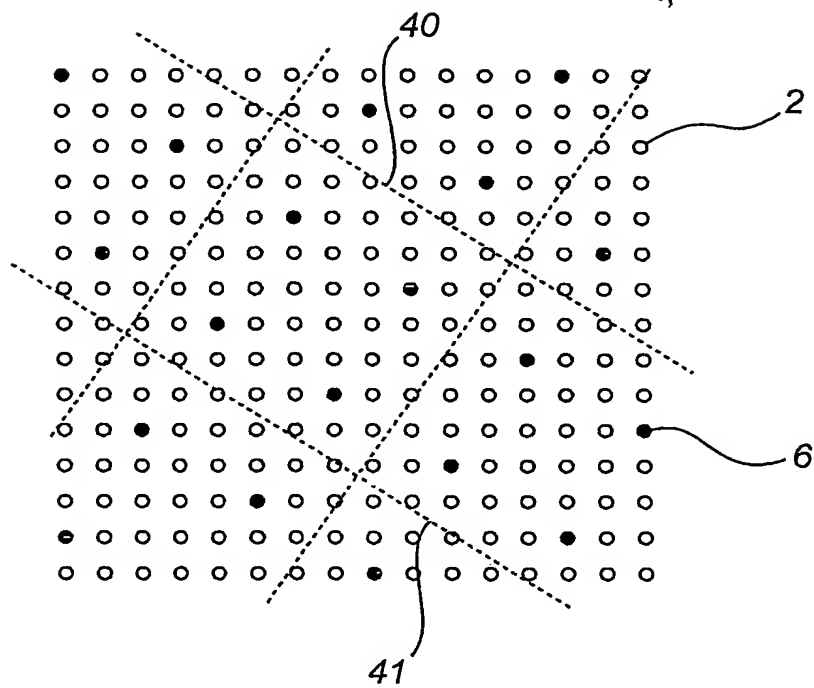


Fig. 5a

4/9

*Fig. 5b*

5/9

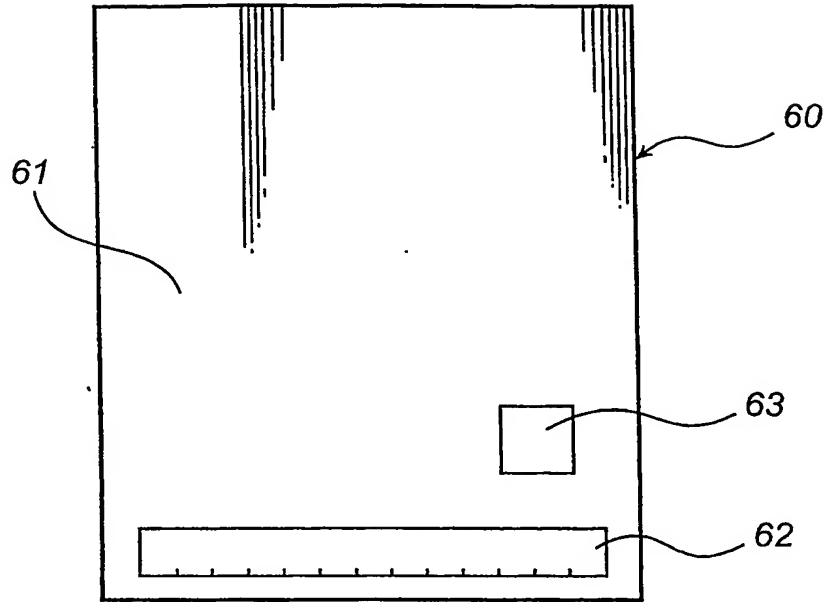


Fig. 6

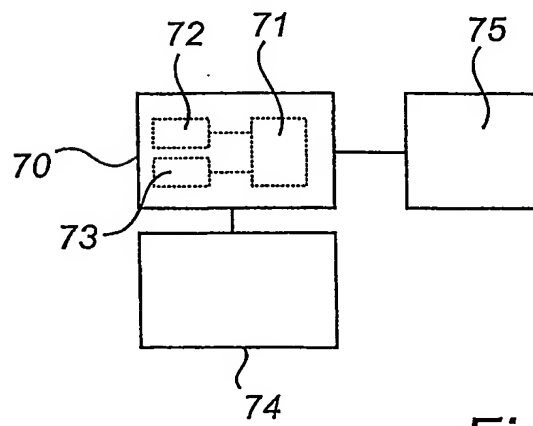


Fig. 7

6/9

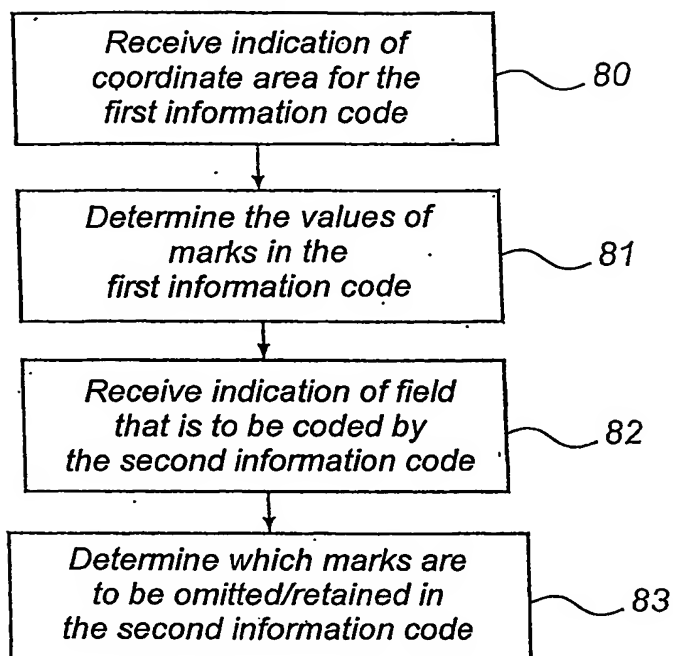


Fig. 8

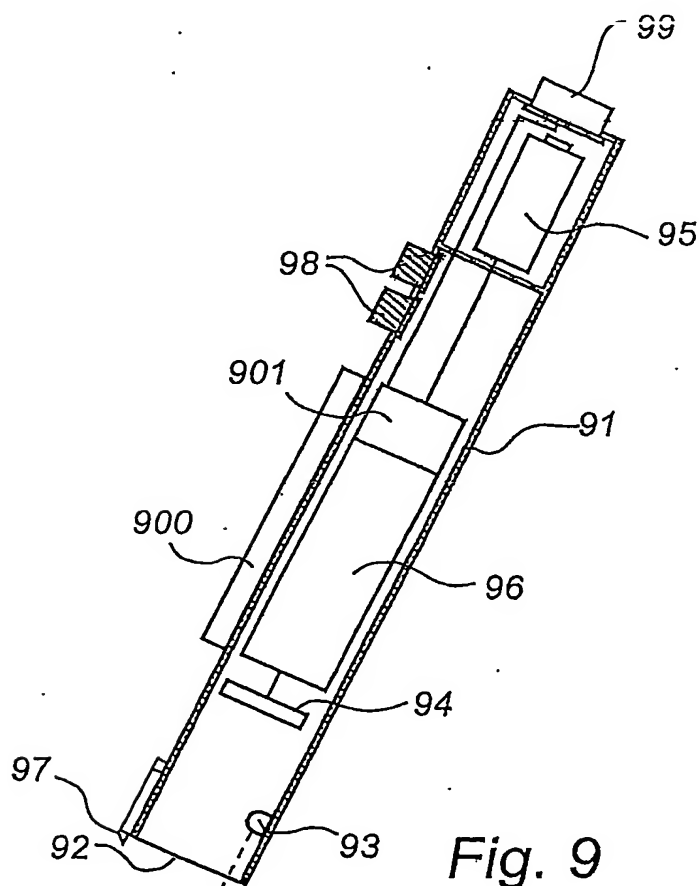


Fig. 9

7/9

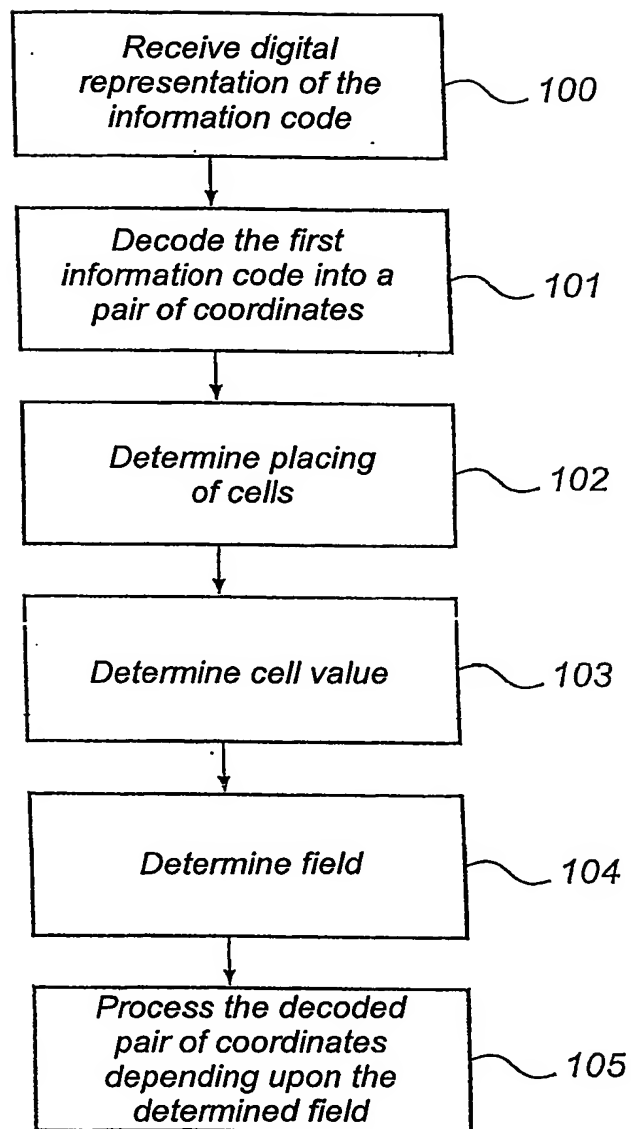


Fig. 10

8/9

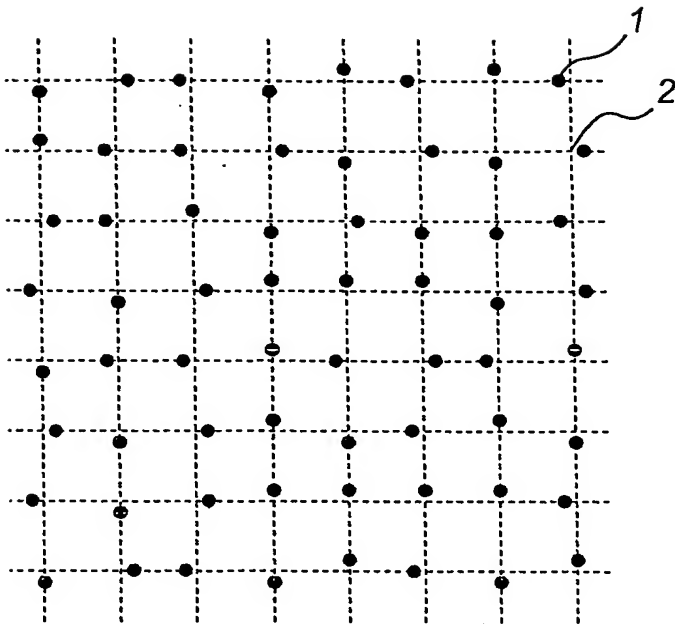


Fig. 11a

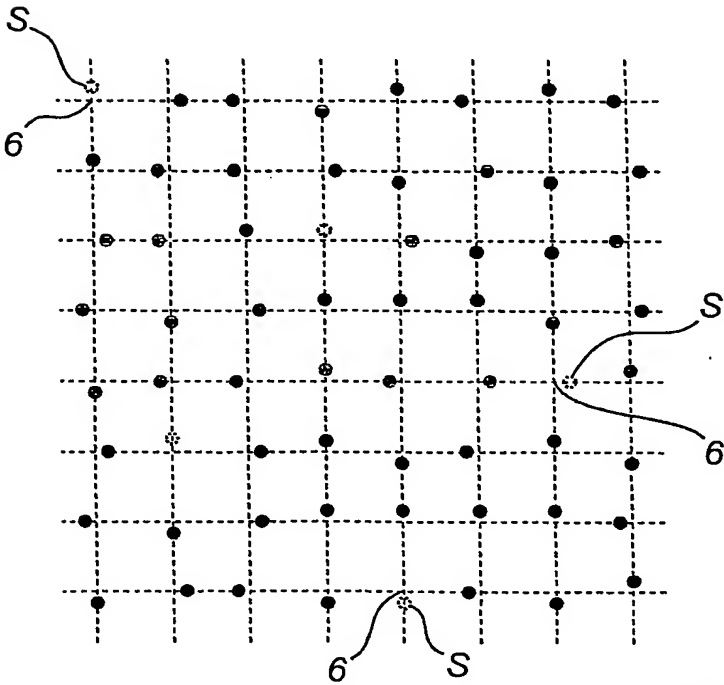


Fig. 11b

9/9

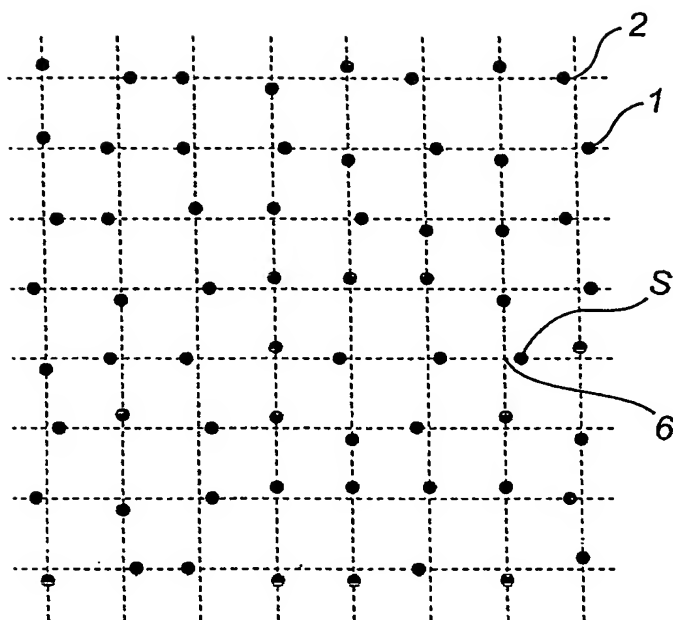


Fig. 11c

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2003/001687

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G06K 19/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G06K, G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0764944 A2 (OLYMPUS OPTICAL CO, LTD), 26 March 1997 (26.03.1997), column 1, line 1 - column 7, line 7, figures 1A,5A,6A,8,10, 12,14, claim 1, abstract --	1-23,25-29
A	EP 0996083 A2 (OLYMPUS OPTICAL CO, LTD), 26 April 2000 (26.04.2000), [0009]-[0020], abstract --	1-29
A	WO 0126032 A1 (ANOTO AB), 12 April 2001 (12.04.2001), page 4, line 3 - page 9, line 28, abstract --	1-29

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"B" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

14 January 2004

Date of mailing of the international search report

04-02-2004

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Pär Heimdal /LR
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2003/001687

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02064380 A1 (MITSUBISHI PENCIL KK), 22 August 2002 (22.08.2002), figures 2-3,5, abstract --	1-29
A	WO 02097698 A1 (IBUSINESS AB), 5 December 2002 (05.12.2002), abstract -- -----	1-29

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/12/2003

International Application No.
PCT/SE 2003/001687

EP	0764944	A2	26/03/1997	JP	9081711 A	28/03/1997
				US	5897669 A	27/04/1999
EP	0996083	A2	26/04/2000	EP	1298579 A	02/04/2003
				AT	195030 T	15/08/2000
				AT	235720 T	15/04/2003
				AU	668987 B	23/05/1996
				AU	4833793 A	26/04/1994
				DE	69329120 D,T	22/03/2001
				DE	69332814 D	00/00/0000
				DK	670555 T	18/09/2000
				EP	0670555 A,B	06/09/1995
				JP	2833975 B	09/12/1998
				JP	3181866 B	03/07/2001
				JP	3390160 B	24/03/2003
				JP	3393045 B	07/04/2003
				JP	3433168 B	04/08/2003
				JP	3455079 B	06/10/2003
				JP	3455080 B	06/10/2003
				JP	6231466 A	19/08/1994
				JP	10187873 A	21/07/1998
				JP	10187907 A	21/07/1998
				JP	10187908 A	21/07/1998
				JP	10187909 A	21/07/1998
				JP	10187910 A	21/07/1998
				JP	10261059 A	29/09/1998
				JP	11007511 A	12/01/1999
				JP	11007512 A	12/01/1999
				JP	11316808 A	16/11/1999
				JP	11328303 A	30/11/1999
				JP	2001125586 A	11/05/2001
				JP	2001143028 A	25/05/2001
				JP	2001160120 A	12/06/2001
				JP	2001175822 A	29/06/2001
				JP	2001184450 A	06/07/2001
				JP	2001184469 A	06/07/2001
				JP	2002099882 A	05/04/2002
				KR	225112 B	15/10/1999
				US	5896403 A	20/04/1999
				US	6052813 A	18/04/2000
				US	6058498 A	02/05/2000
				US	6460155 B	01/10/2002
				US	6622276 B	16/09/2003
				US	2002199149 A	26/12/2002
				WO	9408314 A	14/04/1994

INTERNATIONAL SEARCH REPORT
Information on patent family members

01/12/2003

International application No.
PCT/SE 2003/001687

WO	0126032	A1	12/04/2001	AU	7821800	A	10/05/2001
				AU	7822000	A	10/05/2001
				AU	7977300	A	10/05/2001
				BR	0014449	A	04/06/2002
				BR	0014676	A	18/06/2002
				CA	2384302	A	12/04/2001
				CA	2384308	A	12/04/2001
				CN	1377487	T	30/10/2002
				CN	1377488	T	30/10/2002
				EP	1222604	A	17/07/2002
				EP	1222605	A	17/07/2002
				EP	1224606	A	24/07/2002
				JP	2003511761	T	25/03/2003
				JP	2003511762	T	25/03/2003
				JP	2003511763	T	25/03/2003
				SE	517445	C	04/06/2002
				SE	9903541	A	02/04/2001
				US	6548768	B	15/04/2003
				WO	0126033	A	12/04/2001
				WO	0126034	A	12/04/2001

WO	02064380	A1	22/08/2002	NONE
----	----------	----	------------	------

WO	02097698	A1	05/12/2002	CN	2558353	U	02/07/2003
				SE	0101872	A	30/11/2002
				WO	03020159	A	13/03/2003
